



Air25 Hotel

Burglary protection for your valuables

This safe offers entry-level protection for your valuables, and is large enough for the storage of a laptop, secured by a user-friendly electronic lock with motorised bolt-work.

Key Features

- Compact safe for hotel rooms, student accommodation or other locations with frequent turnover of occupancy
- Steel door and body with dual, plated steel moving bolt-work
- Authorised control and access via electronic lock, master coding, emergency key override and a hand held programming unit
- User friendly electronic lock

Model	External (mm)			Internal (mm)			Weight (kg)	Volume (litres)
	Height	Width	Depth	Height	Width	Depth		
AIR Hotel EL	200	430	350	190	420	300	12	24



The safe is fitted with an electronic lock. The code for the electronic lock is set by the user when closing the safe. The user simply leaves the safe door open when checking out to allow the next user to set a new user code.

LOCKS

Master Code

The lock will accept a programmable master code allowing authorised control and access. The master code also allows access to an event memory function, the audit trail. This audit trail can be downloaded onto a PC or laptop.

Audit Trail

A 105 event history can be read via the keypad and LCD display showing the time, date and method used to open the safe. Methods to open are via user code, master code or emergency override key.

Emergency Opening

In case of an electronic failure or the battery running out of power, an emergency opening can be done with the mechanical override key.

Hand Held Programming Unit

Via the optional hand held programming unit it's possible to set a master code into the safe. This allows an additional authorised entry method for an approved individual as a result of a forgotten user.

CONSTRUCTION

Boltwork

One-way moving boltwork with two 16mm, plated steel bolts.


Door & Body

Door is made of 4mm-thick steel and body of 2mm thick steel.

Anchoring

The enclosed anchoring kit ensures that the safe can be securely positioned and resist removal. The safe has four anchoring holes in the base, each 7,5mm in diameter. Bolts are supplied for masonry fitting, alternative bolts may need to be sourced depending upon the base to which the safe is fitted.

INSTALLATION GUIDE

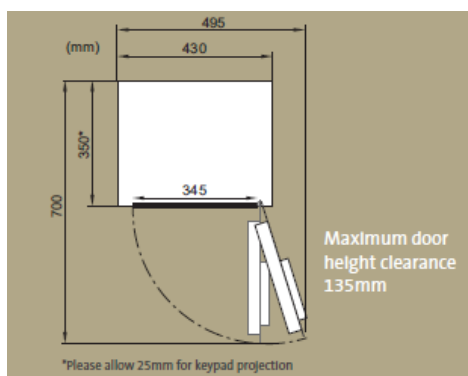

CONTACT GUNNEBO AFRICA FOR MORE INFO

c/o Gunnebo South Africa (Pty) Limited
105 Nagington Road, Wadeville, 1428, South Africa
T +27 (0)11 878 2300 | @ info.za@gunnebo.com
Web www.chubbsafes.co.za | www.gunnebo.co.za