




SUITABLE FOR **STORING**  
A RANGE OF VALUABLE  
**BULK ITEMS**

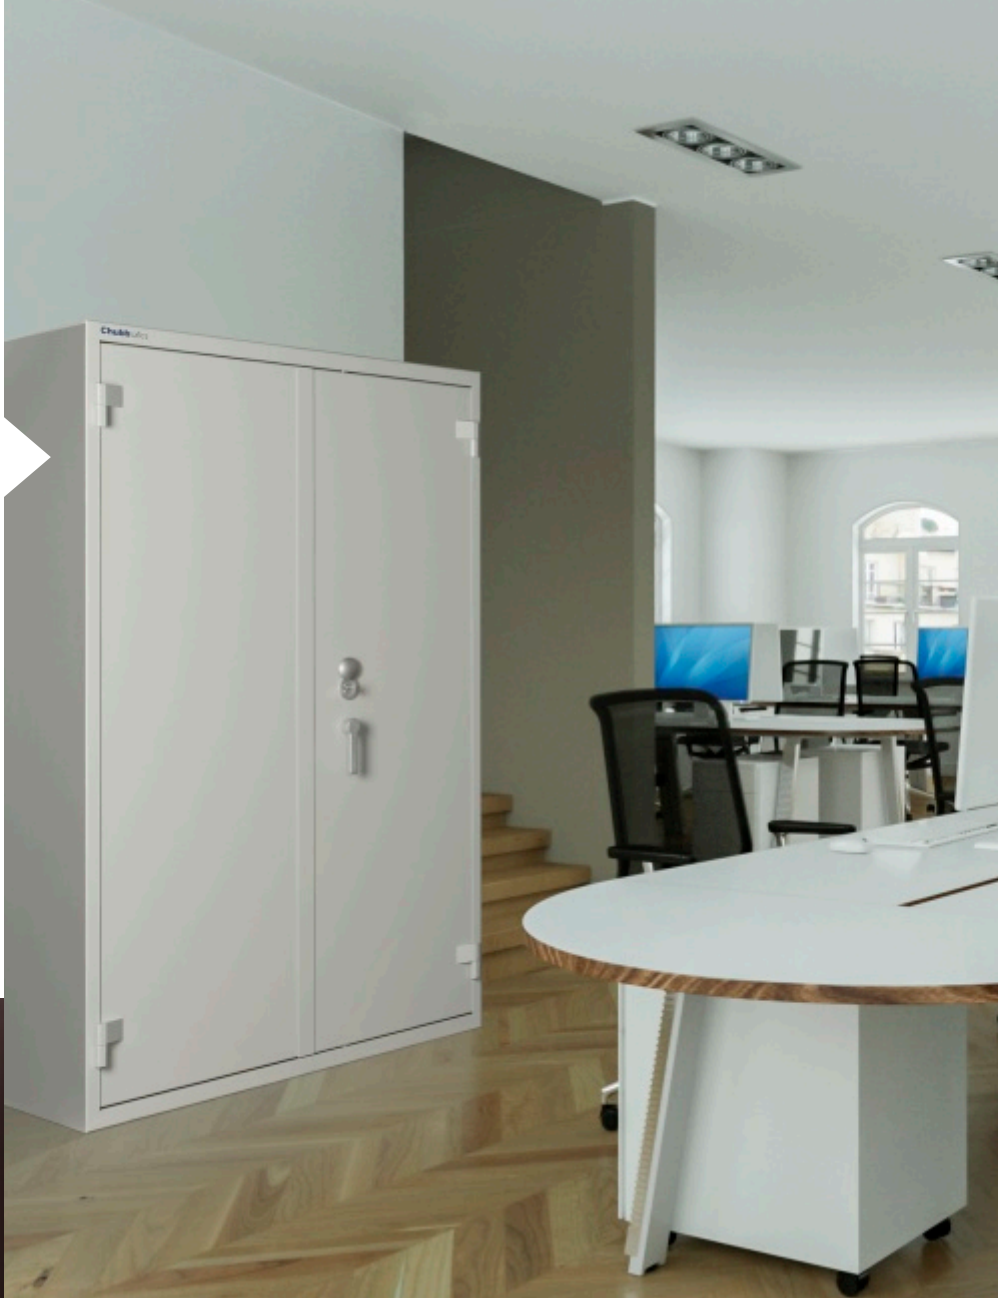

# FORCEGUARD

BURGLARY-RESISTANT PROTECTION



## KEY FEATURES

- Available in four sizes, from 200 to 800 litres, with double doors on models 2–4.
- Single-wall body and door made from 3mm solid steel. Doors have a total thickness of 52mm and open to 180°.
- Secured by three-way boltwork, locking at the top, bottom and side of the door. All bolts are chrome-plated and 20mm in diameter.
- Doors also fitted with relocking device for additional protection against attempted forced entry.
- Key lock (Class A), combination lock (class B) or electronic lock (class B) fitted as standard. All locks approved in accordance with the European EN 1300 standard.
- All models equipped with removable shelves designed to accommodate hanging files.
- Anchor points in the base allow the cabinet to be fixed to the floor.
- All cabinets have a light-grey, powder-coated finish, suitable for any office space (RAL 7035).

# FORCEGUARD

## PRODUCT SPECIFICATIONS

Model	External height (mm)	External width (mm)	External depth (mm)	Internal height (mm)	Internal width (mm)	Internal depth (mm)	Volume (litres)	Weight (kg)	No. of doors	No. of shelves	Rows of hanging files	Capacity hanging files
CHSL T1	1000	600	450	975	575	400	236	80	1	2	3	1.74
CHSL T2	1500	900	450	1475	875	400	534	140	2	3	4	3.52
CHSL T3	1900	900	450	1875	875	400	680	225	2	5	6	5.28
CHSL T4	1900	1220	450	1875	1195	400	920	275	2	5	6	7.20

### LOCK OPTIONS




ForceGuard can be fitted with a double-bitted key lock, a 3-wheel combination lock or a high-security electronic lock as the primary locking option.

All standard locks have been certified by leading standards agency, ECB•S (European Certification Board•Security Systems), in accordance with the European EN 1300 standard. The key lock is Class A-approved and the combination and electronic locks are Class B-certified.

The electronic lock accommodates 1 master code, 1 supervisor code and up to 7 user codes. It features a time delay function of up to 99 minutes, dual control and optional duress alarm. A secondary lock can be fitted on request.

### INTERNAL FITTINGS



All cabinets can be fitted with frames for hanging files. A rail fixed to the roof of the cabinet allows means that an extra file frame can be attached and the largest model can accommodate 7.2 metres of hanging files.

Authorised dealer

[www.chubbsafes.com](http://www.chubbsafes.com)